

# PORON®

Cellular Urethane Foams

---

## Sealing and Gasketing Design Guide



**ROGERS**

SINCE 1832

# Sealing with PORON<sup>®</sup> Microcellular Urethane Materials

---

## **TABLE of CONTENTS**

Seal Design Requirements .....	2
Gasket Material Properties .....	4
Sealing Performance Data .....	6

PORON is a licensed trademark of Rogers Corporation.

---

**The information contained in the PORON Design Guide: Sealing does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose. Results may vary as conditions and equipment vary. The user should determine the suitability of Rogers PORON materials for each specific application.**

# Sealability

---

All materials are permeable to some degree. Polymeric composites, like those used in gasketing and sealing applications, consist of polymers combined with fillers, fibers and other materials to produce a composite with interconnected pores. All gaskets will leak under the right conditions, given enough time. Thus, there is no such thing as a perfect seal. The Society of Automotive Engineers' *Gasket and Joint Design Manual for Engine*

*and Transmission Systems*<sup>1</sup> puts it this way:

"... the results of sealability tests cannot be considered absolute but are relative to somewhat arbitrary standards as defined by the requirements of the particular application.

A seal, therefore, is described by how much the joint leaks. If it doesn't leak too much, too soon, it is considered a seal."

<sup>1</sup>Reprinted with permission from SAE AE-13  
©1988 Society of Automotive Engineers, Inc.

# SEAL DESIGN REQUIREMENTS

## LOAD LIMITS

An assembled housing or enclosure must ensure adequate gasket compression to provide the required level of sealing performance. Increasing the compressive force on a gasket generally improves sealing performance. This force is limited, however, by the strength of the fasteners and the structural integrity of the cover or flange which holds the gasket in place. Excessive clamp loads can snap bolts, crush mounting bosses, or cause excessive bending or creep in the cover.


The lower limit on gasket compression is generally determined by the required sealing performance. In between these upper and lower limits is the range of adequate load which will preserve acceptable sealing for the required life.

Load limits depend on the stack-up of a number of sealing design factors and tolerances:

- Flange flatness tolerance
- Gasket thickness tolerance
- Gasket load-compression behavior
- Allowance for thermal expansion
- Allowance for gasket compression set
- Allowance for flange creep





In **Figure 1**, PORON® microcellular urethane is compared with solid elastomers. The PORON material has a relatively flat load-compression curve. This compressibility enables the load to remain within the required limits while accommodating a larger range of compressions than a solid elastomer. The tight thickness tolerance of PORON materials further widens the overall design limits. Typical load-compression data for a range of PORON materials are shown in **Figure 2**.

**Figure 1. Compression Force Deflection PORON urethane vs. Solid Elastomers**

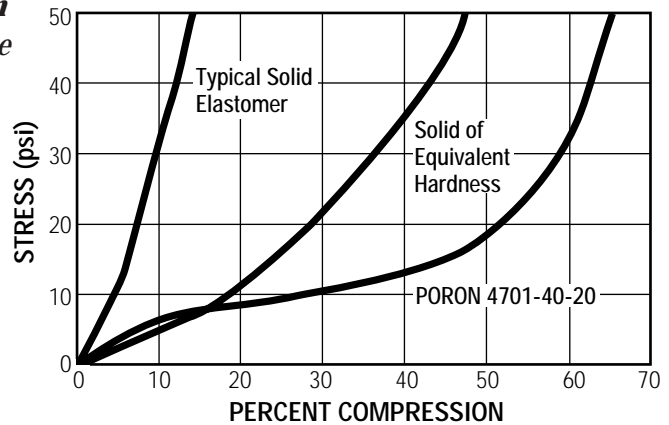

**Figure 2. Typical Load-Compression Data**

PORON microcellular urethanes are available in a range of densities (15, 20, 25, and 30 lb/ft<sup>3</sup>) and a range of firmnesses.

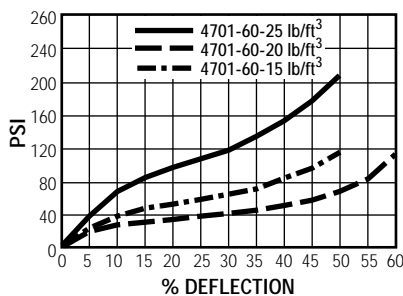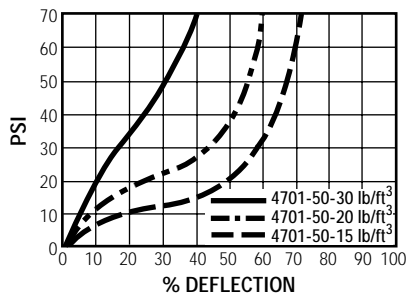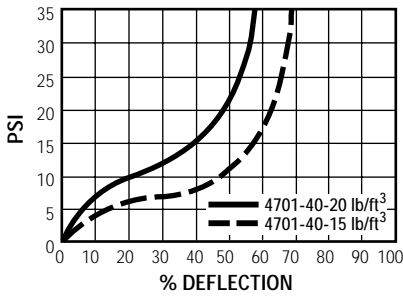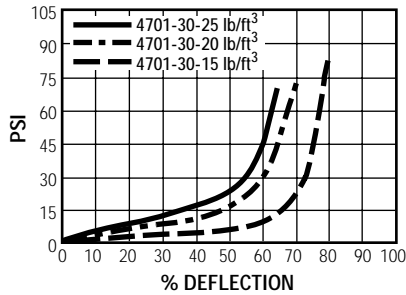

**BOLT PATTERN**

Areas of good and poor sealing are illustrated in **Figure 3**. Bolt pattern and flange design strongly influence sealing performance. Depending on the fastener locations, the actual gasket compression can vary considerably from the nominal compression level. One small area of poor sealing can cause failure in an otherwise well-designed system.

**GASKET WIDTH**

At a given compression level, a wider gasket will seal better than a narrow one due to the longer path length for leakage through or around the gasket material. This sealing advantage comes at the expense of higher compression load due to the extra gasket material which needs to be compressed.


**ENVIRONMENTAL FACTORS**

Environmental considerations can vary tremendously depending on the application. The most common concerns include:

- Outgassing
- Chemical and solvent resistance
- High temperature load retention
- Low temperature flexibility
- Thermal conductivity
- Electrical characteristics
- Coefficient of thermal expansion

Low outgassing and good resistance to many chemicals and solvents make PORON materials suitable for a wide range of gasketing and sealing applications.

**Figure 3. Areas of Good vs. Poor Sealing<sup>2</sup>**

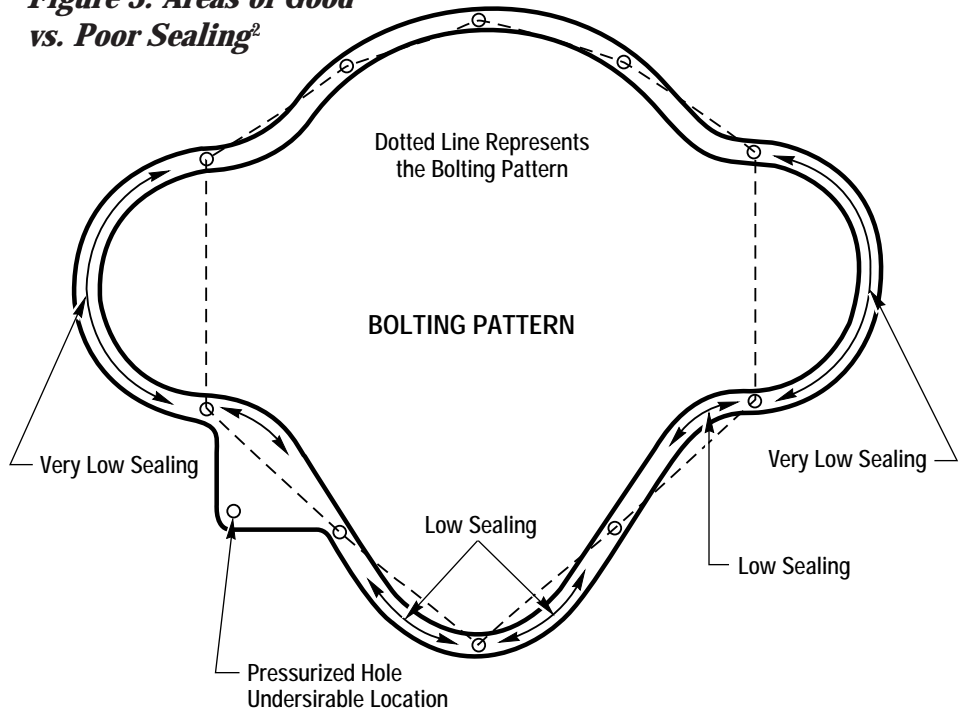

<sup>2</sup>Reprinted with permission from SAE AE-13 ©1988 Society of Automotive Engineers, Inc.

# GASKET MATERIAL PROPERTIES

## LOAD RETENTION

The high temperature life of gasket materials is best represented by load retention. The time to 50% compressive load retention at a series of different temperatures is shown in **Figure 4**. EPDM, polyethylene, neoprene and vinyl nitrile foams perform so poorly at room temperature that performance at higher temperatures could not be measured. Note that PORON performs as well as or better than even a premium grade silicone sponge at temperatures below 70°C (158°F). For higher temperature applications, PORON 4723 high temperature urethane or PORON silicone should be considered. Because load retention testing is difficult and time consuming, most specifications are based on a related short term compression set test.


## OPEN-CELL VERSUS CLOSED-CELL FOAMS

Many designers question how an open-cell material such as PORON urethane can provide an effective seal. Yet with proper design, PORON materials have been successfully used in applications requiring a water seal test at a submerged depth of 18 feet.





The photomicrographs in **Figure 5** show how an open-cell PORON material can seal. The cells in uncompressed PORON urethane are typically 100-150 µm in diameter. The openings between cells, however, are only about 20 µm in diameter. The photos in **Figure 5** show how the cells and the cell openings are deformed as the material is compressed. The openness of PORON materials, and the rate at which it closes with compression, vary with grade and density. PORON microcellular

**Figure 4. Load Retention of Cellular Elastomers**

*Time to 50% of Initial Load*

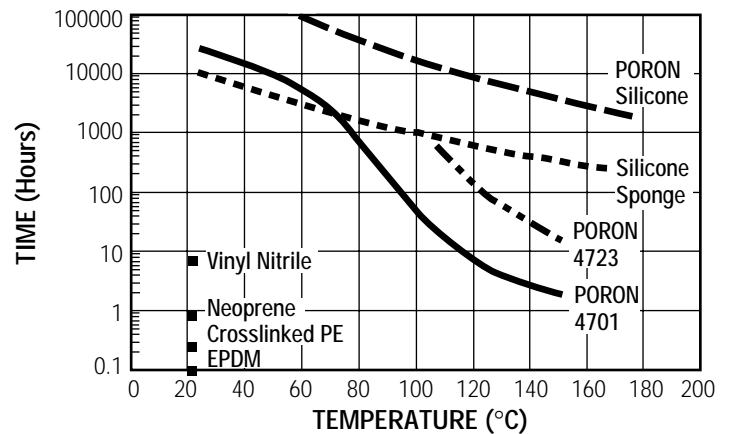

**Figure 5. Cell Structure vs. Compression**  
**Compressed PORON 4701**  
**@ 20 lb/ft<sup>3</sup>**

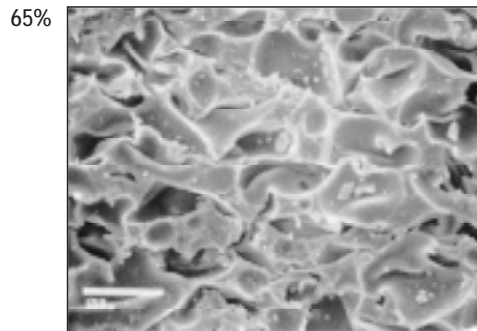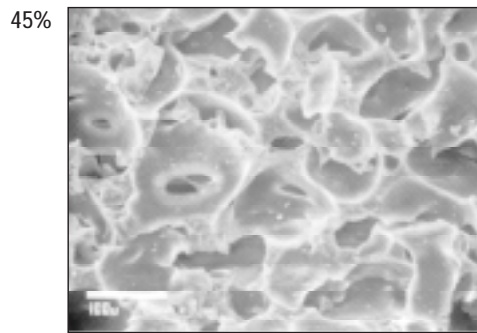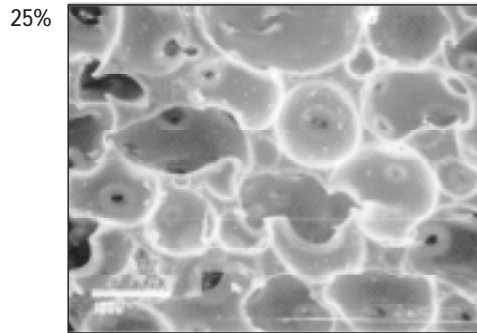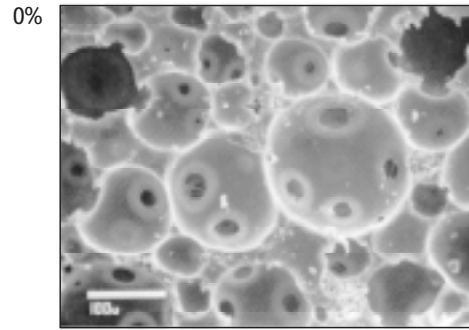

urethanes are based on elastomers with densities of 70-73 lb/ft<sup>3</sup>, so the volume fraction of air in uncompressed PORON microcellular urethane is:

Density (lb/ft <sup>3</sup> )	Air Volume Fraction (%)
15	79
20	72
25	65
30	58

Because closed-cell materials do not have any openings between the cells, they may provide a more effective initial seal at low compression levels. However, elastomers with a closed cell structure do have a significant disadvantage of their own. Closed cell foams derive a significant portion of their modulus from compressing the gas inside each cell. Since all elastomers are gas permeable to some degree, this pressurized gas diffuses out over time, reducing load retention. Because of this effect, the initial load needed to compress a closed cell material is higher than that required for an open celled elastomer of equivalent material modulus. Most of the materials exhibiting poor load retention shown in **Figure 4** are closed cell materials.

# SEALING PERFORMANCE DATA

Most sealing or permeability tests use the same basic technique. A sample is compressed by a controlled amount. Fluid or gas pressure is generated on one side of the material, and the rate of fluid or gas flow is measured on the other side. While the basic format is the same, the tests vary tremendously due to the sample size and configuration, measurement accuracy and duration, pressure, chamber volume, and the fluid used. Measurement techniques are generally chosen to match end use application requirements as closely as possible. There is no standard test which can be used to qualify a material for all potential uses; each application must be considered individually.

The air permeability of PORON 4701-40 is shown in **Figure 6**. As expected, the permeability drops


considerably as compression level increases. **Figure 7** shows typical water permeability of PORON materials based on ASTM F-37. The same relationship between compression and seal effectiveness is found.

For computer disk drive sealing applications, a test which is sensitive at very low air leakage rates is required. A test was developed to measure air flow in mm of water pressure for a small circular gasket at low levels of compression. This test is now used as a QA test for the PORON formulation used in disk drive applications.


Water vapor transmission can also be an important criterion for some applications and is usually measured on uncompressed material. In this case a Thwing Albert #68-1 vapometer is used to characterize PORON materials.

**The sealing performance of a gasket material depends strongly on design factors and the application environment. PORON microcellular elastomers have been used successfully in a wide range of sealing applications. Contact your PORON distributor to discuss the performance requirements for your sealing application.**

**Figure 6. Air Permeability of PORON 4701-40**

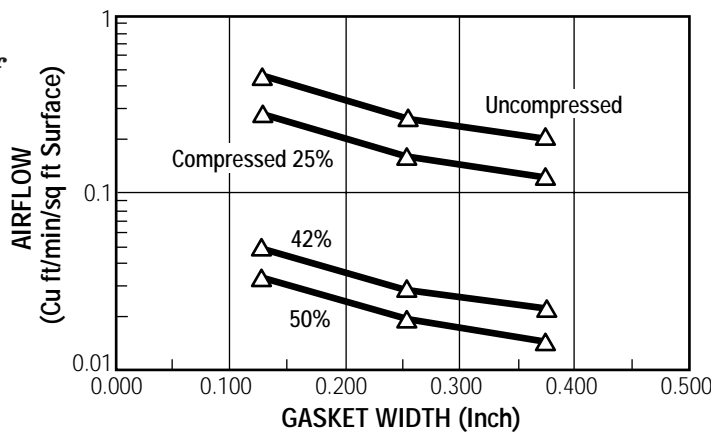

**Figure 7. Water Permeability of PORON 4701-40, ASTM F-37 @ 7 psi**

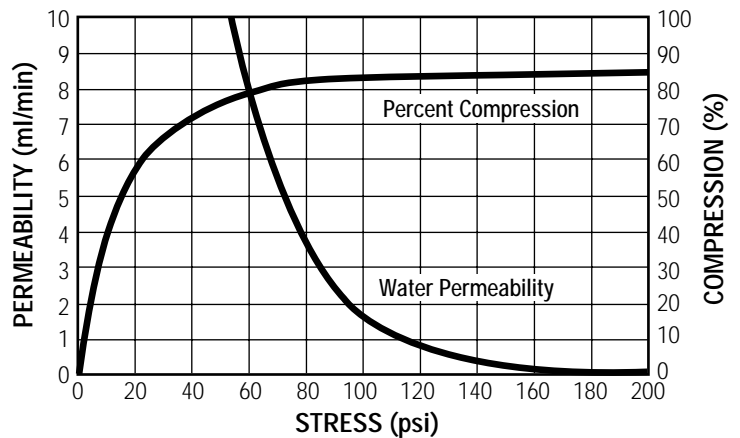

# ROGERS

SINCE 1832

Rogers Corporation  
**High Performance Elastomers Division**  
PORON Materials Unit  
245 Woodstock Road  
Woodstock, CT 06281-1815, USA  
Tel. 860 928-3622  
FAX 860 928-7843  
www.rogers-corp.com



THE WOODSTOCK, CT FACILITY  
IS REGISTERED TO ISO 9002  
CERTIFICATE NO. 3843

## **Rogers, N.V.**

Afrikalaan 188  
B-9000  
Gent, Belgium  
Tel. 32-9-235-36-11  
FAX 32-9-235-36-58

## **Rogers Inoac Corporation**

2-70 Jinnō-cho  
Atsuta-ku, Nagoya  
Japan 456  
Tel. (052) 682-5851  
FAX (052) 682-1720

## **Rogers Southeast Asia, Inc.**

21st Floor, Unit 2  
118 Connaught Road West  
Sheung Wan  
Hong Kong  
Tel. 852-2549-7806  
FAX 852-2549-4576  
Fax: 852-2549-4576

